

SPECIFICATION SHEET

TEHNIČKI LIST




COLLECTION
SERIJA

SANITARY

PRODUCT CODE
ŠIFRA PROIZVODA

A52U200

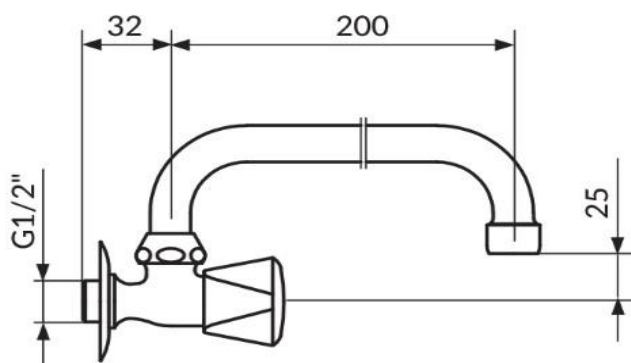

TEHNIČKI PODACI

Zidni ventil
Klasa protoka Z - 7 lit/min
NEOPERL® PERLATOR® HONEYCOMB
Hromirani rukohvat (ABS)
Kompresioni gornji deo sa masnom komorom 1/2"
Inox rozeta
Pokretni izliv 200mm

TECHNICAL DETAILS

Wall mounted tap
Flow class Z - 7 lit/min
Aerator NEOPERL® PERLATOR® HONEYCOMB
Chromed handle (ABS)
Compression cartridge with grease chamber 1/2"
Stainless steel rosette
Swivel spout 200mm

RADNI USLOVI

Maksimalni radni pritisak: 5 bar
Preporučeni radni pritisak: 3 bar
Minimalni radni pritisak: 1 bar
Maksimalna dozvoljena temperatura: 70°C
Preporučena temperatura vode: 50°C

WORKING CONDITIONS

Max. working pressure : 5 bar
Suggested working pressure : 3 bar
Min. working pressure : 1 bar
Max. working temperature : 70°C
Suggested max. water temperature : 50°C

email : info@rosan.rs

www.rosan.rs

